


TOP CLEAN FLAT 10

Ribbed Carpet

This robust, compact and ultra-flat all-purpose ribbed carpet mat with a height of only 10 mm can be laid unsupported. We recommend this version for indoor and covered outdoor areas. Top Clean FLAT mats feature anti-noise and anti-slip properties due to PE-foam coating on the base of the mat. Safely accessible thanks to a built-on aluminium frame with ramped edges. Dirt trickles through the profiles in this open construction.

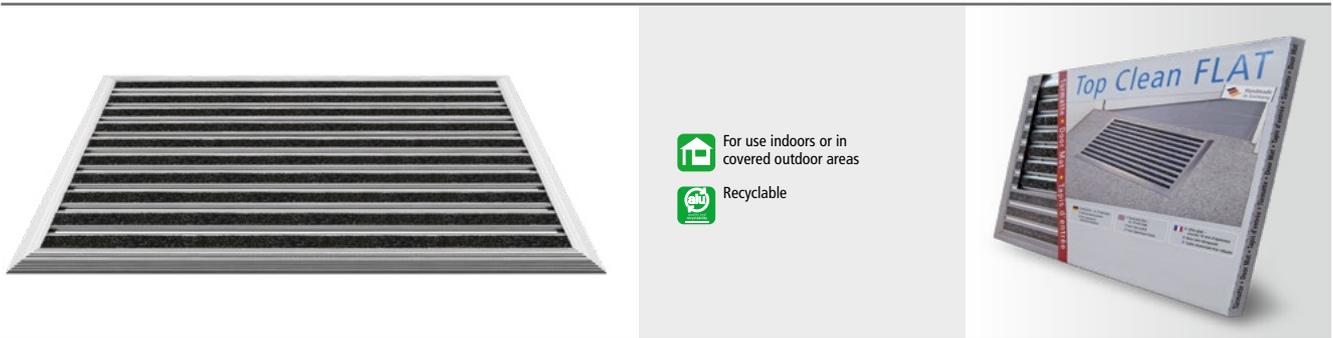


- 1** Zone 1: Coarse Dirt Collecting Area
- 2** Zone 2: Intermediate Zone for heavily frequented Entrance Areas
- 3** Zone 3: Fine Dirt and Damp Dirt Collecting Area


TECHNICAL DATA

Aluminium Profile and Frames	Warp resistant aluminium profile (alloy EN AW 6060). Built-on frame with ramped edges for safe accessibility
Upper	Fine Ribbed Carpet: UV-resistant heavy-duty polypropylene
Underside	Slip resistance and noise reduction achieved by bonded PE-foam
Profile spacing	5 mm
Profile width Fine Ribbed Carpet	35,8 mm
Profile width frame	35 mm
Mat height	ca. 10 mm
Weight / m²	2,2 kg
External Dimensions	ca. 65 x 47 cm
Packaging	Top Clean FLAT entrance mats are packed individually for a perfect product presentation

Safety

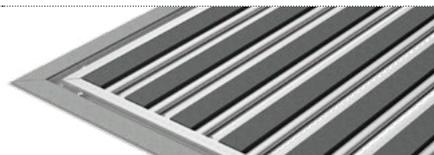

Anti-slip coating on the base

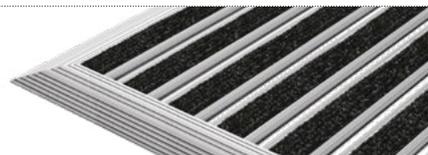

Four-sided ramped edge

TOP CLEAN FLAT 10

Ribbed Carpet


PRODUCT INFORMATION

Traffic¹⁾  normal	Suitability for wheels²⁾  350 kg	Static load³⁾  7.000 kg	Load per wheel⁴⁾  225 kg
Dirt absorption  medium	Moisture absorption  high	Slip resistance  Ribbed Carpet R11	Fire behaviour  Ribbed Carpet Cfl-s1
Warranty⁵⁾  10 years	Reach⁶⁾  REACH-compliant		
Suitability to cross over with	Wheelchair, Luggage trolley		
Areas of application⁷⁾	<ul style="list-style-type: none"> • Object areas • Public areas • Private areas 		

ACCESSORIES

(for an additional charge)	<ul style="list-style-type: none"> • Mat frame • Dirt collecting trays • T-bars (for all multiple-part Top Clean mats without connectors)
----------------------------	--

Ribbed Carpet



010
Anthracite

Due to technical limitations colours are only approximate.

1) Normal: used on foot up to approx. 2,800 times, medium: approx. 2,800 times or more, strong: approx. 5,100 times or more per day.
 2) Suitable for a customary lift truck (tandem rollers) up to the specified total weight.
 3) The static load tests to establish the load-bearing capacity of our entrance mats have been performed on a testing machine able to conduct tests with a load of up to 100 t, using a 10 x 10 cm (=100 cm²) pressure vessel. Mats with Brush Strips or Scraper Bars are only suitable for wheeled items to a limited extent. It is vital to avoid accelerating, braking or manoeuvring on the mats!

4) The specified loads refer to a polyurethane wheel with a diameter of 85 mm and width of 100 mm. When investigating our entrance matting systems, we simulated the point load that is applied to the mat by a single roller. To obtain the overall load, this value can be multiplied by the number of rollers that the means of transportation has.
 5) Production and material defect warranty. The warranty depends on the manner of application, installation, and regular cleaning and maintenance in accordance with the recommendations of GEGGUS. All warranties are subject to our Terms of Sale and Supply. These can be found on the Internet at www.geggus.de.

6) GEGGUS products do not contain, in a concentration of more than 0.1%, any substances that are currently considered to be of very high concern (SVHC) and that are included on the candidate list.
 7) When assessing the requirements for a particular application, the performance features of the individual mat types should be taken into account.